


# 食品级耐真空PVC塑筋管 A4-123

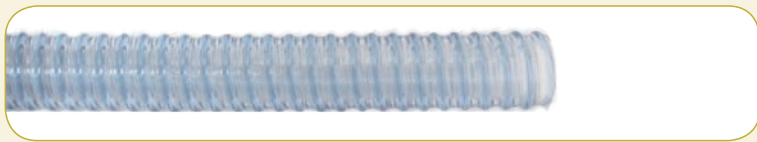

#### 颜色:

- 透明

#### 温度:

- -26° C 至 +70° C

#### 结构:

- 内层: 透明的(聚氯乙烯)Pliovic 材料,(通过 FDA、3-A、USDA 认证),符合 NSF-61 标准
- 外层: 透明的(聚氯乙烯)Pliovic 材料(波纹状结构)
- 增强层: 透明的高密度(聚氯乙烯)Pliovic 螺旋材料

#### 应用:

- 几乎可用于任何类型的, 大宗干性食品物料或液流的重力流或真空式输送作业

#### 认证:

- USDA, 3A, FDA

#### Colour:

- Transparent with steel spiral

#### Temperature range:

- -26°C to 70°C

#### Construction:

- Tube: Clear Pliovic® (FDA, 3-A, USDA compliant), NSF-61
- Cover: Clear Pliovic (corrugated construction)
- Reinforcement: Clear high-density rigid Pliovic® helix

#### Applications:

- Nutriflex™ S&D hose is capable of handling almost every type of dry bulk food material or liquid in gravity flow and vacuum service.

#### Standards:

- USDA, 3A, FDA

## 食品级耐真空PVC塑筋管 A4-123

产品编码 No.	内径		外径 mm	工作压力		弯曲半径 mm	真空度		重量 kg/m	包装长度 m
	in.	mm		psi.	bar		in.	mm		
A4-123-1000	1"	25.4	32.8	60	4.1	38	29	737	0.33	30.48
A4-123-1250	1-1/4"	31.8	39.6	50	3.4	64	29	737	0.42	30.48
A4-123-1500	1-1/2"	38.1	47.8	50	3.4	81	29	737	0.46	30.48
A4-123-2000	2"	50.8	61.7	40	2.8	81	29	737	0.76	30.48
A4-123-2500	2-1/2"	63.5	76.2	35	2.4	114	29	737	1.22	30.48
A4-123-3000	3"	76.2	90.9	35	2.4	165	29	737	1.56	30.48
A4-123-4000	4"	101.6	119.6	35	2.4	264	29	737	2.49	30.48
A4-123-5000	5"	127.0	142.8	25	1.7	747	29	737	3.02	30.48
A4-123-6000	6"	152.4	170.7	25	1.7	747	29	737	3.38	30.48

**blueFuture**

您身边的工业专家