


蒸汽胶管 A4-201

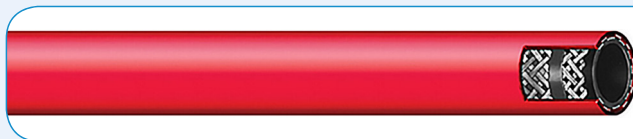

应用:

■ 本品可用于清洁、热控、防火、泵吸、融解、吹风等作业，或用于蒸汽泵和起重设备的开口端或永久性安装作业。本胶管可在精炼厂、造船厂、化工厂、轧钢厂、铸造厂以及重工业设施上使用，在这些场合往往会遇到严酷的环境条件，要求胶管具备较高的强度

技术参数:

- 内层: 氯化丁基合成橡胶
- 增强层: 编织钢丝 (3/4" 及其以上规格为2层编织钢丝)
- 外层: 红色或黑色的Pyrosyn®合成橡胶
- 温度: 0° F至425° F (-18° C至218° C)
- 包装: 具有平滑管外层的产品: 成卷, 或50' 切割长度 (1/2" -每箱4条; 3/4" -每箱3条; 1" -每箱2条); 具有包覆管外层的产品: 1/2" 50' 精确长度, 每箱4条, 3/4" -1" 50' 精确长度, 每箱3条, 1 1/4" - 2" 50' 精确长度, 每箱1条
- 管标标识: 连续的标识如 "Flexsteel 250 CB Steam SF Goodyear 250psi W.P. Drain after Using Made in USA."

Applications:

■ Used for cleaning, heat control, fire prevention, pumping, thawing, blowout service, steam pumps and hoists in open-end or permanent installation operations. It is used in refineries, shipyards, chemical plants, steel mills, foundries and heavy industrial applications where high strength is required and where severe environmental conditions are encountered

Technical description:

- Tube: Chlorobutyl synthetic rubber
- Reinforcement: Braided steel wire (3/4" and higher have 2 steel wire braids)
- Cover: Red or black Pyrosyn® synthetic rubber
- Temperature: -40°F to 425°F (-40°C to 218°C)
- Packaging: Wrapped cover: 1/2" Four 50' exact length/box ;3/4" - 1" Three 50' exact length/box;1 1/4" - 2" One 50' exact length/box
- Branding: Example: Goodyear® Flexsteel® 250 CB Steam Max WP 250 PSI. Made in USA

蒸汽胶管 FLEXSTEEL 250 CB STEAM

产品编码 No.	内径		外径 mm	工作压力 bar	重量 kg/m	包装长度 m
	in	mm				
A4-201-0500	1/2	12.7	25.4	17.2	0.63	152.40
A4-201-0750	3/4	19.1	33.3	17.2	0.95	152.40
A4-201-1000	1	25.4	39.6	17.2	1.15	152.40
A4-201-1250	1-1/4	31.8	44.5	17.2	1.58	152.40
A4-201-1500	1-1/2	38.1	50.8	17.2	2.11	152.40
A4-201-2000	2	50.8	63.5	17.2	2.54	152.40

blueFuture

您身边的工业专家