


食品级1.5mm物料PU软管 PL-024

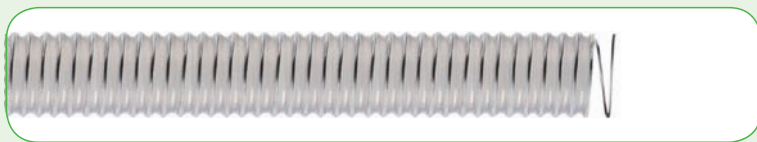

颜色:

- 透明, 带有 PU 覆盖层的螺旋状镀锌钢丝加强

温度:

- 40°C/+ 90°C (短时间可耐受 125°C)

技术特性:

- 聚醚型聚氨酯软管, 带有 PU 覆盖层的螺旋状镀锌钢丝加强筋。内壁平滑以保证物料在管内流动顺畅。壁厚均为 1.5 毫米。耐霉菌、耐水解。具有优异的耐臭氧和耐候性能。符合 FDA, EU10/2011。该软管无毒、无味、不含卤素, 符合 RoHS 环保指令的要求。螺旋钢丝接地可以排静电, 符合 TRB S 2153 的规定。阻燃度符合 UL 94 HB 标准。

应用:

- 食品加工行业、制药行业、割草机和扫地清洁车等需要耐霉菌和耐水解的应用。可用于油脂类食品的输送。

Colour:

- Translucent with zinc colored TPU-coated steel spiral.

Temperature range:

- 40°C+90°C. We do not recommend the use of SIP cleaning, which can severely impair the hose life.

Features:

- Ether based polyurethane hose reinforced with a TPU-coated steel spiral to offer the best adhesion with the hose wall. Smooth inside to ensure optimization of flow properties. Resistant to microbes and Hydrolysis. Good resistance to mineral oils and chemicals, excellent resistance to ozone and weather. Suitable to deliver dry food stuffs in accordance to EU 10/2011 and FDA. Very flexible even at low temperatures, better than a comparable ester based hose. Halogen free and conform to RoHS regulations. Antistatic by grounding the spiral in conformity with TRB S 2153 regulations. Flame retardant according with UL 94 HB.

Applications:

- Suction and transport hose in the Food and Pharmaceutical Industry. For street cleaning vehicles, in the chemical industry, and for all applications where microbes resistance is required.

食品级1.5mm物料PU软管 PL-024

产品编码 No.	内径		壁厚	耐负压	弯曲半径	体积	重量	包装长度
	in.	mm	mm	mH2O	mm	m ³	kg/m	m
PL-024-1000	1"	25	1.5	9.5	30	0.041	0.305	20
PL-024-1250	1-1/4"	32	1.5	9.5	35	0.056	0.435	20
PL-024-1500	1-1/2"	38	1.5	9.5	40	0.074	0.465	20
PL-024-1580	1-9/16"	40	1.5	9.5	50	0.077	0.485	20
PL-024-1770	*	45	1.5	9.0	50	0.090	0.545	20
PL-024-1970	*	50	1.5	9.0	60	0.099	0.600	20
PL-024-2000	2"	51	1.5	9.0	60	0.106	0.610	20
PL-024-2360	2-3/8"	60	1.5	8.5	70	0.122	0.710	20
PL-024-2500	2-1/2"	63	1.5	8.0	70	0.148	0.745	20
PL-024-2560	2-9/16"	65	1.5	7.5	70	0.152	0.765	20
PL-024-2760	*	70	1.5	7.5	80	0.165	0.920	20
PL-024-2950	*	75	1.5	7.0	80	0.176	0.985	20
PL-024-3000	3"	76	1.5	7.0	90	0.232	0.995	20
PL-024-3150	*	80	1.5	6.0	90	0.254	1.045	20
PL-024-3540	*	90	1.5	5.0	100	0.294	1.170	20
PL-024-3940	*	100	1.5	4.0	120	0.281	1.295	15
PL-024-4000	4"	102	1.5	3.5	120	0.286	1.320	15
PL-024-4330	*	110	1.5	3.2	130	0.307	1.420	15
PL-024-4720	*	120	1.5	3.0	140	0.333	1.545	15
PL-024-5000	5"	127	1.5	2.9	150	0.405	2.015	15
PL-024-5120	*	130	1.5	2.6	150	0.414	2.065	15
PL-024-5510	*	140	1.5	2.4	160	0.504	2.215	15
PL-024-5910	*	150	1.5	2.0	170	0.537	2.370	15
PL-024-6000	6"	152	1.5	2.0	170	0.544	2.400	15
PL-024-6300	*	160	1.5	1.8	180	0.662	2.525	15
PL-024-7090	*	180	1.5	1.5	210	0.855	2.580	15
PL-024-7870	*	200	1.5	1.2	230	1.130	2.860	15
PL-024-8000	8"	203	1.5	1.2	230	1.146	2.900	15
PL-024-8980	*	228	1.5	1.0	260	0.933	3.250	10
PL-024-9840	*	250	1.5	0.8	290	1.170	3.555	10
PL-024-10000	10"	254	1.5	0.8	290	1.188	3.610	10
PL-024-10430	*	265	1.5	0.7	300	1.238	3.765	10
PL-024-11000	11"	279	1.5	0.7	320	1.301	3.960	10
PL-024-12000	12"	305	1.5	0.7	350	1.618	5.245	10

blueFuture
您身边的工业专家