


排吸水管VOLGA

A5-041

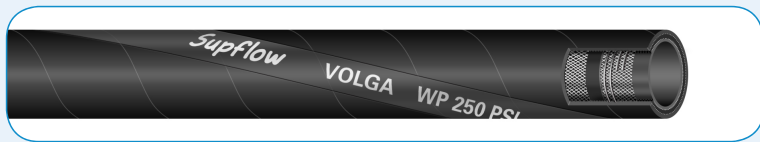

应用:

适用于工业、农业和建筑领域的吸排水处理。

技术参数:

- 内层: 丁苯合成橡胶, 黑色, 光滑, 耐受的酸碱值从5到10PH
- 增强层: 高强度合成线绳, 内置双层螺旋钢丝增强
- 外层: 丁苯合成橡胶, 黑色, 表面布纹, 耐磨, 耐候, 耐臭氧
- 工作温度: -30°C至+85°C

Applications:

Water hose for suction and delivery purposes in tough applications in industry, agriculture and construction.

Technical Description:

- Tube: SBR, Black, smooth, resistant to waste water from 5 to 10 pH
- Reinforcement: High tensile textile cord, dual steel helix
- Cover: SBR, Black, smooth with cloth impression, weather, ozone and abrasion resistant
- Temperature range: -30°C to + 85°C

排吸水管 VOLGA

| 产品编码 No. | 内径 in mm | 外径 mm | 工作压力 bar | 爆破压力 bar | 耐负压 bar | 弯曲半径 mm | 重量 kg/m | 包装长度 m | |
|-------------|-------------|----------|-------------|-------------|------------|------------|------------|-----------|----|
| VOLGA-0750 | 3/4" | 19 | 29 | 17 | 52 | 0.9 | 76 | 0.51 | 60 |
| VOLGA-1000 | 1" | 25 | 36 | 17 | 52 | 0.9 | 100 | 0.71 | 60 |
| VOLGA-1250 | 1-1/4" | 32 | 43 | 17 | 52 | 0.9 | 128 | 0.9 | 60 |
| VOLGA-1500 | 1-1/2" | 38 | 50 | 17 | 52 | 0.9 | 152 | 1.32 | 60 |
| VOLGA-1750 | 1-3/4" | 45 | 58 | 17 | 52 | 0.9 | 180 | 1.57 | 60 |
| VOLGA-2000 | 2" | 51 | 64 | 17 | 52 | 0.9 | 204 | 1.75 | 60 |
| VOLGA-2500 | 2-1/2" | 63 | 76 | 17 | 52 | 0.9 | 252 | 2.25 | 60 |
| VOLGA-2750 | 2-3/4" | 70 | 84 | 17 | 52 | 0.9 | 280 | 2.62 | 60 |
| VOLGA-3000 | 3" | 76 | 90 | 17 | 52 | 0.9 | 304 | 2.9 | 60 |
| VOLGA-4000 | 4" | 102 | 118 | 17 | 52 | 0.9 | 408 | 4.4 | 60 |
| VOLGA-5000 | 5" | 127 | 144 | 17 | 52 | 0.9 | 508 | 6.05 | 60 |
| VOLGA-6000 | 6" | 152 | 173 | 17 | 52 | 0.9 | 760 | 9.11 | 60 |
| VOLGA-8000 | 8" | 203 | 228 | 17 | 52 | 0.9 | 1015 | 14.72 | 40 |
| VOLGA-10000 | 10" | 254 | 284 | 17 | 52 | 0.9 | 1270 | 22.5 | 12 |
| VOLGA-12000 | 12" | 305 | 339 | 17 | 52 | 0.9 | 1830 | 32.56 | 12 |

