


超柔特氟龙软管

AX-004

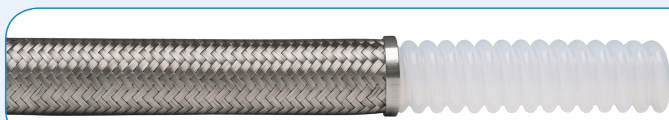

应用:

特别柔软, 并且在高温时都有极好的耐高压和耐真空性能, 符合FDA认证。
特别适用于需要弯曲性能佳的场合。

技术参数:

- 口径: 1/4"到6", 符合DIN26054-2
- 标准与防静电内衬可供选择, 防静电型通过ATEX认证
- 里层为波纹状PTFE软管, 外覆SS304不锈钢编织
- 特别柔软, 并且在高温时都有很好的耐压性能
- 特别适用于需要弯曲性能极佳的场合
- 工作温度: -70°C 至+260°C

适用标准及认证:

- FDA 21CFR 177.1550, USP

Applications:

Choose when difficult routing or arduous flexing is required. Also for low pressure applications where bare tube with cuffed ends are required.

Technical Description:

- Range 1/4"-6" (DN6-DN150) hose in accordance to DIN 26054-2.
- Virgin and anti-static liners available, ATEX Certified
- A high profile, deep convoluted, medium wall PTFE hose available with or without external stainless steel vacuum spiral and 304 stainless steel over braid as standard.
- Excellent vacuum and pressure ratings, even at elevated temperatures
- Choose when difficult routing or arduous flexing is required. Also for low pressure applications where bare tube with cuffed ends are required
- Temperature range: -70°C to +260°C

Standard/Approval:

- FDA 21CFR 177.1550, USP

超柔特氟龙软管

AX-004

产品编码 No.	Size in.	内径		外径		内衬壁厚 mm	工作压力 bar	爆破压力 bar	弯曲半径 mm	真空度 bar	重量 kg/m	包装长度 m
		min	max	min	max							
AX-004-0250	1/4"	5.5	6.9	9.9	11.5	0.75	35	170	25	0.744	0.080	20
AX-004-0380	3/8"	8.5	10.5	13.2	14.7	0.65	35	170	25	0.744	0.123	20
AX-004-0500	1/2"	11.6	13.6	12.9	14.4	0.75	60	300	25	0.887	0.140	20
AX-004-0630	5/8"	15.1	16.4	16.2	17.5	0.80	55	270	35	0.887	0.160	20
AX-004-0750	3/4"	19.5	20.5	28.6	31.4	1.00	60	290	55	0.887	0.390	20
AX-004-1000	1"	24.5	25.5	34.2	38.2	1.00	40	210	85	0.887	0.540	20
AX-004-1250	1-1/4"	31.5	32.5	41.9	46.1	1.00	40	210	100	0.887	0.680	20
AX-004-1500	1-1/2"	36.5	37.5	47.2	49.9	1.50	35	175	120	0.887	1.110	20
AX-004-1750	1-3/4"	44.5	45.5	55.8	61.4	1.50	25	135	135	0.887	1.650	20
AX-004-2000	2"	49.5	50.5	60.5	66.7	1.65	25	135	165	0.887	1.710	20
AX-004-2500	2-1/2"	62.5	63.5	80.9	89.1	1.60	16	80	230	0.887	2.140	20
AX-004-3000	3"	73.5	74.5	90.4	99.6	1.60	14	65	260	0.887	3.310	20
AX-004-4000	4"	94.5	99.5	121.1	127.5	1.82	10	40	300	0.887	4.050	20
AX-004-5000	5"	128.0	132.0	151.0	161.0	2.20	6	24	450	0.554	5.500	12
AX-004-6000	6"	150.0	154.0	179.0	189.0	2.50	6	24	520	0.554	6.000	12

防静电软管可供选择, 可提供翻边特氟龙管总成, 长度可定制

