


食品排吸管 NIREUS

A5-012

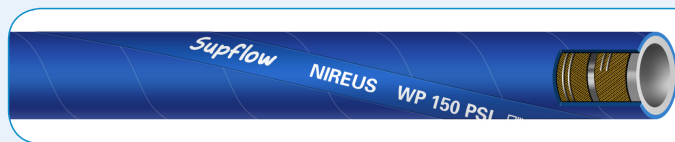

应用:

- 用于水、葡萄酒、啤酒、果汁和软饮料的抽吸和输送，广泛应用于酿酒工厂

技术参数:

- 内层: 三元乙丙合成橡胶, 白色, 光滑, 食品级
- 增强层: 高强度合成线绳, 内置双层螺旋钢丝增强
- 外层: 三元乙丙合成橡胶, 蓝色, 表面布纹, 耐磨, 耐候, 耐臭氧
- 工作温度: -40°C至+100°C

适用标准及认证:

- FDA 21.CFR.177.1520

Applications:

- Suction and delivery hose for transporting water, wine, beer, juice and soft drinks, excellent choice for brewery and winery applications

Technical description:

- Tube: EPDM, White, smooth, food quality
- Reinforcement: High tensile textile cord, dual galvanized steel helix
- Cover: EPDM, Blue, smooth with cloth impression, resistant to weather, ozone and abrasion
- Temperature range: -40°C +100°C

Standard/Approval:

- FDA 21. CFR. 177. 1520

食品排吸管 NIREUS

产品编码 No.	内径 in mm	外径 mm	工作压力 bar	爆破压力 bar	耐负压 bar	弯曲半径 mm	重量 kg/m	包装长度 m	
NIREUS-0750	3/4"	19	31	10	30	0.9	76	0.70	40
NIREUS-1000	1"	25	37	10	30	0.9	100	0.88	40
NIREUS-1250	1-1/4"	32	44	10	30	0.9	128	1.06	40
NIREUS-1500	1-1/2"	38	50	10	30	0.9	152	1.22	40
NIREUS-2000	2"	51	63	10	30	0.9	204	1.68	40
NIREUS-2500	2-1/2"	63	75	10	30	0.9	252	2.22	40
NIREUS-3000	3"	76	89	10	30	0.9	304	2.84	40
NIREUS-4000	4"	102	116	10	30	0.9	408	3.92	40

